

USL 60

Universal skirting board, particularly suitable for laminate floors



Extended decor range!
Top quality for modern housing

Döllken-Weimar combines the USL 60 skirting board, convincing with its attractive look and good application properties, with modern laminate floors. Its elegant and modern shape and the newly available decors emphasise an excellent optical match to current laminate collections of leading manufacturers.

Please visit www.doellken-weimar.de for current designs


Convincing advantages:

- **elegant and modern shape**
- **excellent technical properties**
- **easy application with Döllken hot melt adhesive**
- **moisture resistant**
- **REACH-compliant**



USL 60

new designs for modern living rooms



1 sales unit = 10 x 4 m

Specification

- made of expanded polyblend based on PVC (all content conforms to REACH)

Accessories (1 sales unit = 10 pieces, available in 8 colours)



Internal corners 90°



External corners 90°



End caps left/right

Installation recommendation




Döllken
Hot-melt

The method of fastening depends on the wall substructure, which the contractor should check for adequate quality and strength. The skirting board must be laid without tension and especially positive tolerances should be avoided. Fastening pitch max. 30 - 40 cm.

Non-binding recommendation of colour combinations:

USL 60	Zubehör
white	uni white
canadian maple	uni beech
light beech	uni beech
grey ash	uni grey
aluminium metallic	uni silver
beech steamed	uni beech
canadian pine	uni grey/uni white
mountain oak	uni grey
white oak	uni grey
oak	uni oak
colorado oak	uni rustic
niagara hemlock	uni rustic
rio cherry	uni rustic
beech	uni beech
walnut	uni antic
florida pine	uni grey/uni black
brown oak	uni rustic
black	uni black

Colours

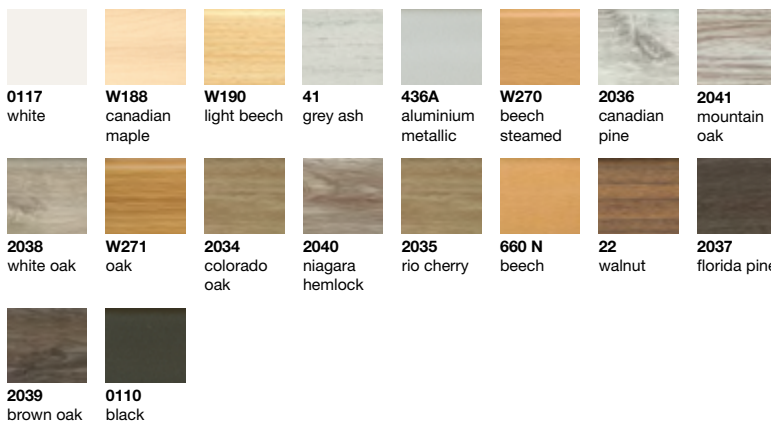

DÖLLKEN

W E I M A R

A SURTECO COMPANY